

UNIVERSAL DOOR SEALS

DRAUGHT & VERMIN STOP

D-SERIES



Extremely durable
flexible basis...

... & unique
vermin block



**STOPS
DRAUGHT**



**STOPS
TEMPERATURE LOSS**



**STOPS PESTS
& VERMIN**



**STOPS
DUST**



SAVINGS

Reduced energy costs, environmentally conscious, reduced repair and maintenance costs.



SAFETY

Complies with the international health and safety regulations including clear yellow-black striping of the weather seal.



HYGIENE

Reduced dust, moisture and air pollution.



PESTS & VERMIN

Prevention by means of vermin block in bottom seal.



HEALTH

A safe, dry and draught free working environment for employees.



CERTIFICATION

94% reduction of draught and dust certified by BlowerDoor (D).



INSTALLATION

Quick, universal installation by means of unique magnetic fastening.(convenient adapter for installation on non-steel surfaces)

A product of CWR International Gbr

www.em-flex.eu

Em-Flex universal dock and door seals

Arnhemseweg 60
3832 GN Leusden
The Netherlands

Tel: +31 33 258 5654
Mobile: +31 622 853 648
Email: info@em-flex.eu

CWR International Gbr

Prozessionsweg 23
48493 Wettingen
Deutschland


Tel: +49 2557 929576
Fax: +49 2557 929577
www.em-flex.eu

Product specifications D-series

Material specifications D-series for universal doors

Flexible, fibre-reinforced material for inside and outside applications
UV and mildew resistant.

Temp. resistance	-20°C up to +70°C
Coating	acrylate
Tensile strength	2600/2400 (N/5cm) DIN 53354
Tear resistance	250/250 (N) DIN 53386
Built in depth/width	>4mm/120mm
Colour	black/yellow or any RAL colour
Flexible permanent magnet - universal installation	
Thickness	> 1,0 mm
Material property	anisotropic
Bonding capacity	lifelong (without external influences)

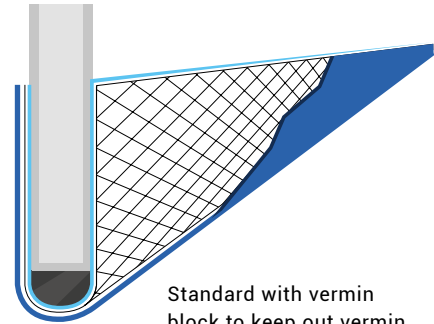

Standard with vermin block to keep out vermin



SAFE



HYGIENIC



ENERGY SAVING




EASY FIX

Available sizes

Seal DB* Type DB40

DB 28087 = L 0,875 mm
DB 28100 = L 1,000 mm
DB 28112 = L 1,125 mm
DB 28125 = L 1,250 mm
DB 28200 = L 2,000 mm
DB 28225 = L 2,500 mm

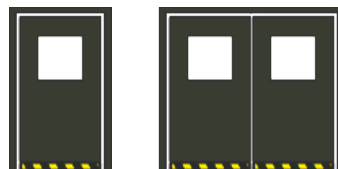

Available upto 12.000 mm

* Including vermin block to keep out pests



Transport

Transport by postal services

We are constantly working on the further development and improvement of our products. Therefore we reserve the right to change our product specifications without notice.