

OVERHEAD DOOR & ROLLER SHUTTER SEALS

eM-FLEX
UNIVERSAL DOCK AND DOOR SEALS

DRAUGHT & VERMIN STOP

O/R/H-SERIES



Extremely durable
flexible basis...

... & unique
vermin block



**STOPS
DRAUGHT**



**STOPS
TEMPERATURE LOSS**



**STOPS PESTS
& VERMIN**



**STOPS
DUST**



SAVINGS

Reduced energy costs, environmentally conscious, reduced repair and maintenance costs.



SAFETY

Complies with the international health and safety regulations including clear yellow-black striping of the weather seal.



HYGIENE

Reduced dust, moisture and air pollution.



PESTS & VERMIN

Prevention by means of vermin block in bottom seal.



HEALTH

A safe, dry and draught free working environment for employees.



CERTIFICATION

94% reduction of draught and dust certified by BlowerDoor (D).



INSTALLATION

Quick, universal installation by means of unique magnetic fastening. (convenient adapter for installation on non-steel surfaces)

A product of CWR International Gbr

www.em-flex.eu

Em-Flex universal dock and door seals

Arnhemseweg 60
3832 GN Leusden
The Netherlands

Tel: +31 33 258 5654
Mobile: +31 622 853 648
Email: info@em-flex.eu

CWR International Gbr

Prozessionsweg 23
48493 Wettingen
Deutschland


Tel: +49 2557 929576
Fax: +49 2557 929577
www.em-flex.eu

Product specifications O/R/H-series

Material specifications O/R/H-series for doors

Flexible, fibre-reinforced material for inside and outside applications
UV and mildew resistant.

| | |
|--|--|
| Temp. resistance | -20°C up to +70°C |
| Coating | acrylate |
| Tensile strength | 2600/2400 (N/5cm) DIN 53354 |
| Tear resistance | 250/250 (N) DIN 53386 |
| Built in depth/width | >4mm/120mm |
| Colour | black/yellow or any RAL colour |
| Flexible permanent magnet - universal installation | |
| Thickness | > 1,0 mm |
| Material property | anisotropic |
| Bonding capacity | lifelong (without external influences) |

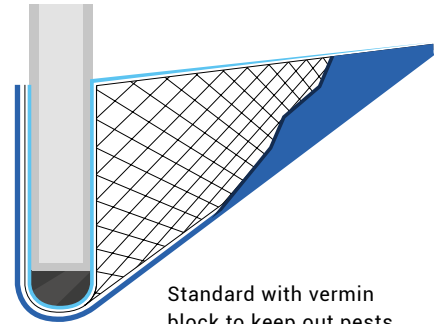

SAFE



HYGIENIC



ENERGY SAVING



EASY FIX


Available sizes

ODB/RSB/HSB

| | |
|--------------|---------|
| ODB 4010 | - basis |
| ODBM 40100** | - KDW |
| RSB 32100 | - basis |
| RSBM 32100** | - KDW |
| HSB 40100 | - basis |
| KDW | - KDW* |

KDW (vermin block)
- vermin black inlay
Black/yellow or any required RAL


ODB Overhead door



RSB Roller shutter



HSB High speed roller shutter



Can be supplied upto max 7000mm
* Extra price integrated vermin block
** Including integrated vermin block



Transport

Transport by postal services

We are constantly working on the further development and improvement of our products. Therefore we reserve the right to change our product specifications without notice.